



General Arrangement Drawing

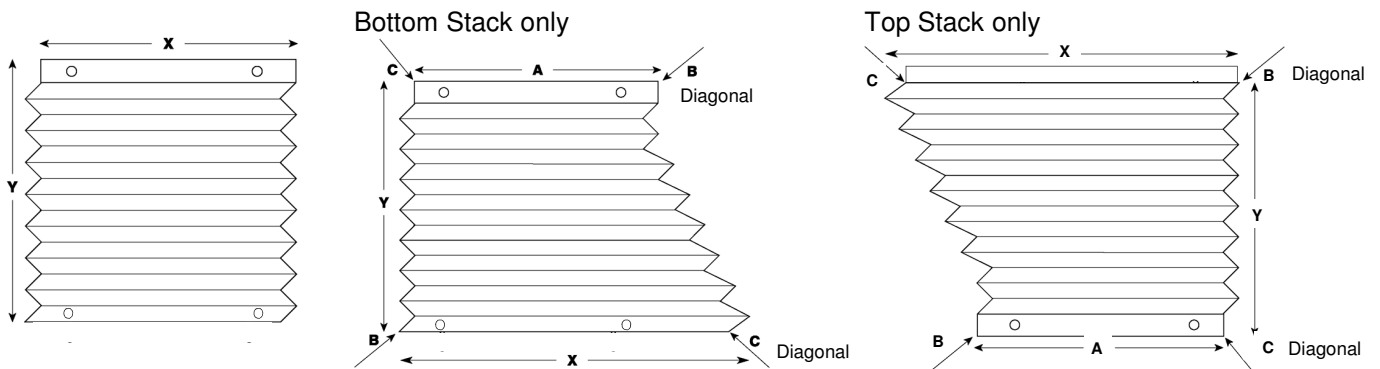

Design Points

- Colour choice – Navy, Crème, Bone or White
- Simple to fit
- Top and bottom stacking options
- Top fix, Face or Frame fix, supplied complete with fixings
- Hold down options: Popper, Bung, Velcro & crossbar
- Hold up options: Popper or Velcro
- No wires or cords
- Shaped blinds must be stacked on the longer end
- Battened bottom bar, fixed with two stainless steel press studs
- Smaller blinds may be mounted at angles of up to 20° from vertical. Larger blinds, however, will not hold their shape.
- Top and bottom should be parallel
- Pleat stack retained by straps with stainless steel press studs, up to 4 straps supplied, depending on width of shade
- Stacking options - see opposite
- Valance flap available to cover stack
- Fabric may be cleaned with foam upholstery cleaner. For light cleaning use water and a sponge rubbed in the direction parallel to the pleats

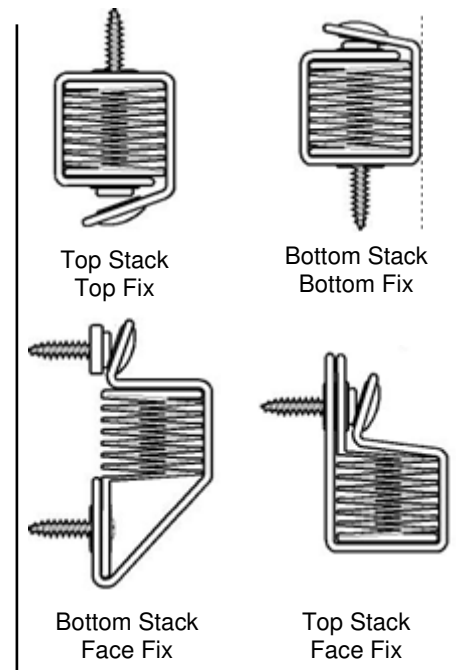

Custom

- Maximum recommended blind size 1200mm (47¼") wide by 700mm (27½") deep. Outside these sizes please refer to Oceanair
- Some basic shapes possible - sketch your shape
- Different fixing spacing and strap positions can be supplied on request

Technical Specification

- Fabric is a shade – silhouettes are visible but not details of people or objects
- Size of pleat is 25mm (1").
- All fixings stainless steel - press studs on strapping.
- Fabric 100% polyester.

Calculating Stacking Height

- Top stack / face fix = 25mm (head batten) + 5mm for every 100mm of blind drop
- Bottom stack / face fix = 25mm (head batten) + 15mm (strap stud) + 5mm for every 100mm of drop
- Bottom & top stack / top fix = 10mm (strap overlap) + 5mm for every 100mm of blind drop

How to Order

- To order use our custom order form