



RAILSHADE 900 - Technical Sheet 08

OEM Custom product available to the Trade in negotiated minimum batch quantities only

General Arrangement Drawing

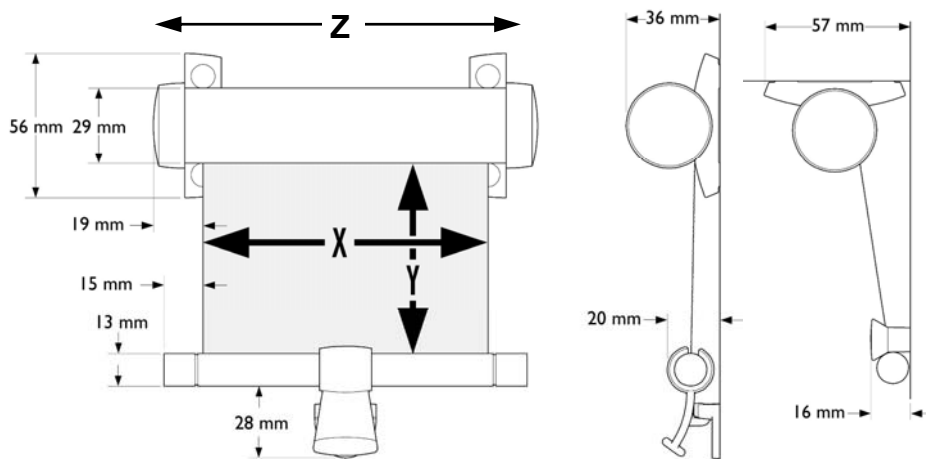

Hold Down Options

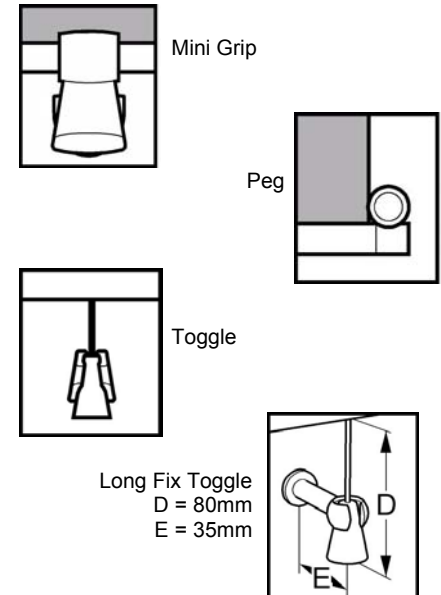

Install Design Points

- Can be mounted on a horizontal and vertical surface - top or face fix options
- Blind can be pulled up, down or across
- Variety of hook down features - pegs and/or toggles
- Requires no clearance each end for fixing into position
- Can be fitted to slightly uneven surface

Custom

- Maximum width with standard fabric 1000mm (39³/₈"), drop 900mm (35³/₈")
- Blinds over 800 mm (31¹/₂") wide have two handles
- Variety of crossbar/handle options – see above
- Standard finish is silver anodised. Powder coat colours beige RAL 9001, white RAL 9016, grey 7035 and matt black are also available
- Standard moulding colour is light grey
- Fabric choice: Solar Shield, White Odyssey, Rayure, Soltis white mesh shade fabric with silver grey backing, or PVC in white, cream, grey, black

How to Order

- To order refer the Z or X and Y measurements to the standard sizes or use our customer order form

Technical Specification

- Aluminium is silver anodised to 15 microns
- If polyester powder coated the aluminium components are etched and alichromed before coating
- Stainless steel recoil springs
- Standard Solar Shield off-white polyester blackout water repellent fabric. Other fabric specifications subject to choice

Oceanair Marine Limited Chichester PO20 0AY England

Tel +44 (0)1243 606909 Fax +44 (0)1243 608300 www.oceanair.co.uk E-mail TechSupport@oceanair.co.uk